

## Packing List

One of the following sets are included depending on the purchased reference:



### DT30

Frontal Gasket

..... 1 set

*Includes 5 units*



### DT35

Rearward Gasket

..... 1 set


*Includes 5 units*

0033497-080424

# JBC

www.jbctools.com

## INSTRUCTION MANUAL



### DT30 / DT35


Frontal and Rearward  
Gaskets for DT530

## Gasket Replacement



Be careful when manipulating the tool. The metal and glass parts may be hot.

Hold down the tool with one hand onto the stand (1) and grasp the suction tube at the point where it meets the suction tube connector and pull upward (2) to undock the solder-collector from the heating element guard.

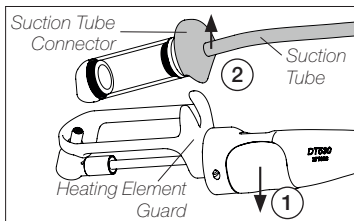

www.jbctools.com



Detach the suction tube connector from the solder-collector by gently pulling in opposite directions (3). If the solder-collector is too hot, use the heat-resistant gripper provided with the tool.

Remove both gaskets by pulling out as well.

Replace the worn gasket or gaskets and fit the rear gasket onto the solder-collector (4). Make sure that the gasket is placed on the same side as the wool filter and that both filters are as pressed back against the gasket as possible using the cleaning brush (5) provided with the tool.

Fit the frontal gasket onto the solder-collector (6) and reassemble it to the suction tube connector.

Finally reassemble the whole group to the desoldering iron.

