

## Packing List

The following items are included:



**DT13**  
Paper Prefilter ..... 1 box  
*Contains 10 filters*

0034735-101024

**JBC**  
www.jbctools.com

## INSTRUCTION MANUAL




### DT13


## Paper Prefilter for DT530

## Prefilter Replacement

Hold down the tool with one hand onto the stand (1) and grasp the suction hose at the point where it meets the protective cover and pull upward (2) to undock the solder-collector group from the heating element.

Then take the frontal gasket and the worn paper prefilter out.

 Be careful when manipulating the tool. The metal and glass parts may be hot.

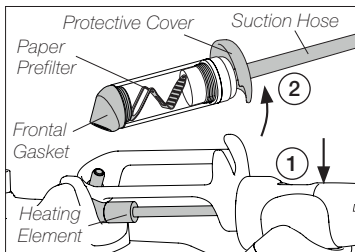


www.jbctools.com




**Note:** The paper prefilter is a throwaway product. When dirty and worn, replace it.

Before inserting the paper prefilter into the solder collector, fold it as shown at the right:

### Folding the Paper Prefilter



Assembly sequence for solder collector group spare parts and paper prefilter:

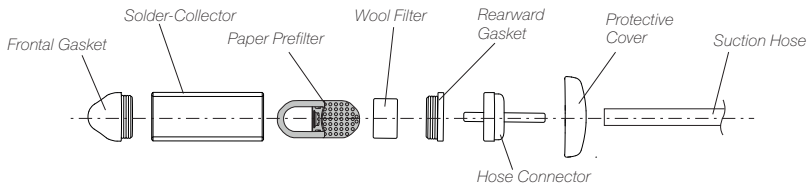

### Positioning the Paper Prefilter

To position the paper prefilter correctly, do as follows:

Remove the front gasket and insert the folded paper prefilter with its perforated side against the wool filter.

Reinsert the front gasket and position it with its opening facing the same direction as the filter-leg with the large opening. Reassemble the solder-collector group onto the tool.

