



DDSD

2-Tool Rework Station with DT530

This Plug & Play Guide corresponds to the following references:

Ref.

DDSD-9QA (100 V)
DDSD-1QA (120 V)
DDSD-2QA (230 V)

Station

More Information on the
product web page



Packing List

The following items are included according purchased station reference:



DDE
2-Tool Control Unit 1 unit
 Ref. DDE-9C (100 V)
 Ref. DDE-1C (120 V)
 Ref. DDE-2C (230 V)



T245
General Purpose Handle 1 unit
 Ref. T245-A



DT530
Angled Desoldering Iron 1 unit
 Ref. DT530-A



MSE
Electric Desoldering Module 1 unit
 Ref. MSE-B



ADS
Stand for T210 & T245 Handles 1 unit
 Ref. AD-SF



DTS
Stand for DT530 1 unit
 Ref. DT-SA




SCH
Cartridge Holder 1 unit
 Ref. SCH-A

Installation

DDE
2-Tool
Control Unit



Power Cord
Included in DDE Control Unit

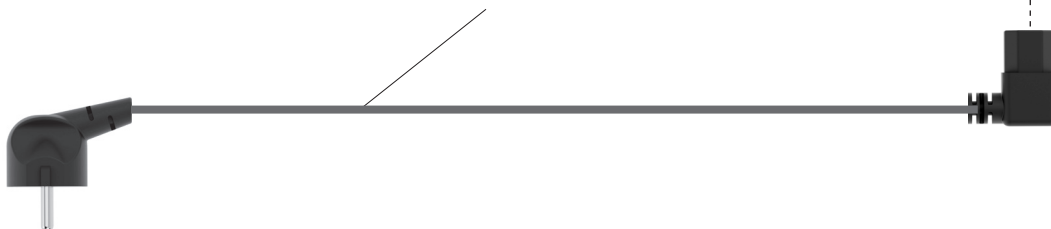

Installation

DDE
2-Tool Control Unit



C245 *
Cartridge Range



T245
General Purpose Handle

Module Cable
Ref. 0024228



D530 *
Tip Range

DT530
Angled Desoldering Iron

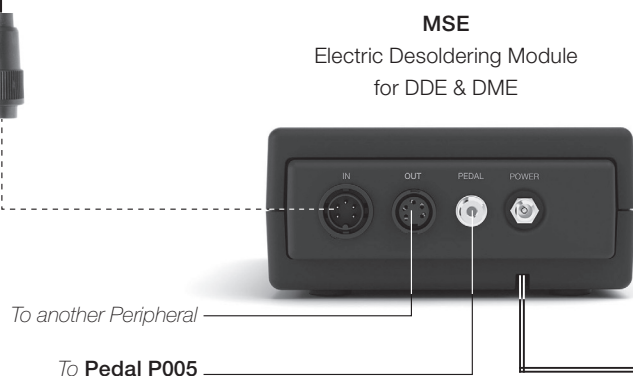

* Not included, sold separately.

Specifications

DDSD

2-Tool Rework Station with DT530

Ref. **DDSD-9QA** (100 V)

Ref. **DDSD-1QA** (120 V)

Ref. **DDSD-2QA** (230 V)

- Package Dimensions / Weight: 495 x 415 x 395 mm / 12.04 kg
(L x H x W) 19.49 x 16.34 x 15.55 in / 26.54 lb

Complies with CE standards.

ESD safe.

JBC

Warranty

Information regarding the warranty of each product can be found on the final page of its instruction manual.



This product should not be thrown in the garbage.

In accordance with the European directive 2012/19/EU, electronic equipment at the end of its life must be collected and returned to an authorized recycling facility.