



## NANE

### 2-Tool Nano Soldering Station

This Plug & Play Guide corresponds to the following references:

Ref.

**NANE-9C** (100 V)  
**NANE-1C** (120 V)  
**NANE-2C** (230 V)

#### Station

More Information at the  
product web page



#### Video Guide

Watch the  
product video



## Packing List

The following items are included according purchased station reference:



**NAE**  
**2-Tool Nano Control Unit** ..... 1 unit  
 Ref. NAE-9C (100 V)  
 Ref. NAE-1C (120 V)  
 Ref. NAE-2C (230 V)

**NT115**  
**Nano Handle** ..... 2 units  
 Ref. NT115-A



Ref. 0020952 includes:  
 Ref. C115-101 x1  
 C115-103 x1  
 C115-107 x1  
 C115-112 x1  
 Ref. 0020953 includes:  
 Ref. C115-105 x2  
 C115-113 x2



**Cartridge**  
**Dispenser Case** ..... 2 units  
 Ref. 0020952 / Ref. 0020953


**P405**  
**Pedal for Nano Stations** ..... 1 unit  
 Ref. P-405

## Installation


**NAE**  
 2-Tool Nano Control Unit



**Power Cord**  
 Supplied in NAE Control Unit

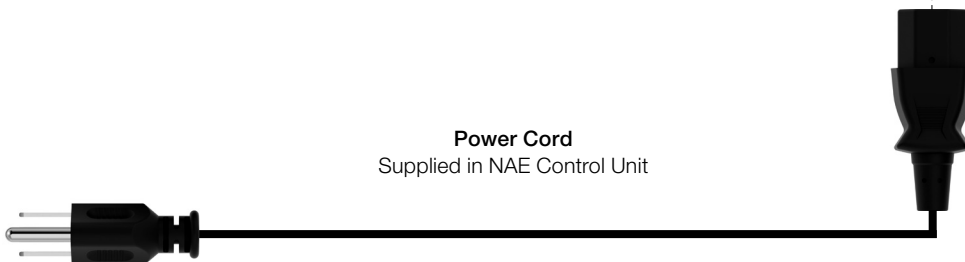

# Installation

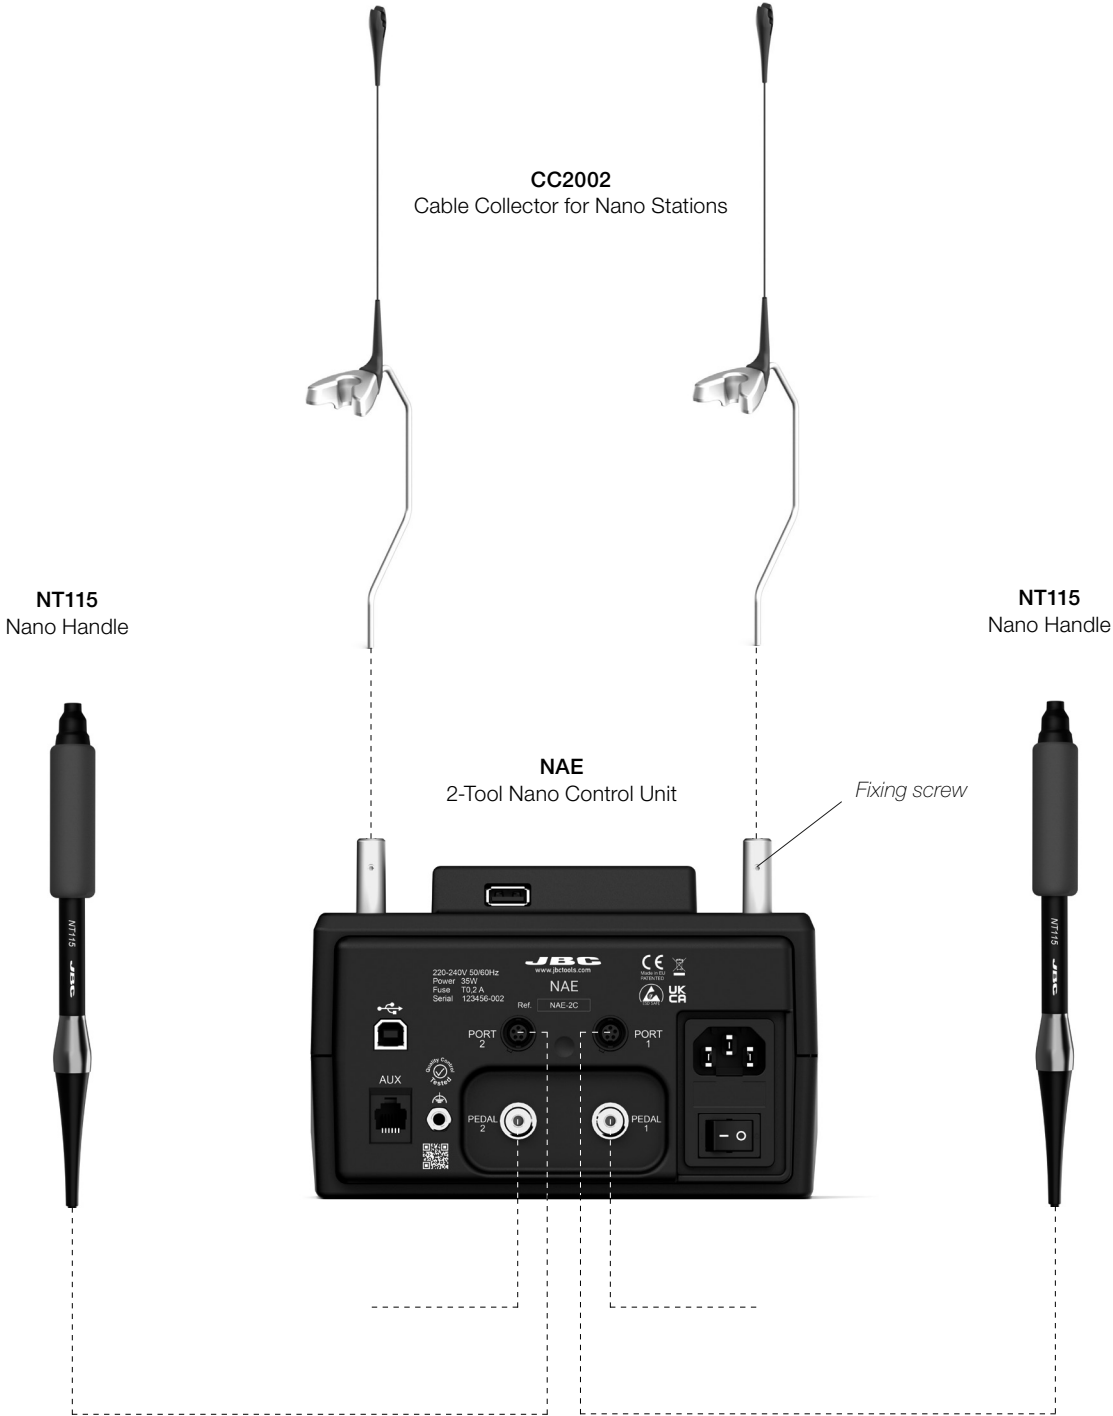

## Specifications

### NANE

#### 2-Tool Nano Rework Station

Ref. **NANE-9C** (100 V) 50/60 Hz. Input fuse: 0.5 A. Output: 8.5 V.

Ref. **NANE-1C** (120 V) 50/60 Hz. Input fuse: 0.5 A. Output: 8.5 V.

Ref. **NANE-2C** (230 V) 50/60 Hz. Input fuse: 0.2 A. Output: 8.5 V.

- Package Dimensions / Weight: 280 x 280 x 164 mm / 3.88 kg  
(L x H x W) 11.02 x 11.02 x 6.46 in / 8.55 lb

Complies with CE standards.  
ESD safe.

# JBC

### Warranty

Information regarding the warranty of each product can be found on the final page of its instruction manual.



This product should not be thrown in the garbage.

In accordance with the European directive 2012/19/EU, electronic equipment at the end of its life must be collected and returned to an authorized recycling facility.